

## Idealkit2



**[ART. 1122/A] Relay**  
12-24 V DC/AC 5A power supply for general purposes; needed to add an additional bell to kit 8260 or kit 8261.  
Dimensions: 66x85x35mm (4 DIN modules).



**[ART. 1142W/OK]**  
**Desk base for OKAY telephones**  
White RAL 9010 desk base which allows all the Okay series telephones to be converted into the desk version. Complete with 1.5 mt of white cable and connection boss.  
Dimensions: 80.5x183x53 mm.



**[ART. 1200] Transformer**  
Transformer with 230V primary, 12V AC/15 VA secondary winding for continuous use.  
Dimensions: 53x95x65 mm (3 DIN modules).



**[ART. 3560] Flush-mounted door entry phone external unit - 1 push-button for 2 wire kit**  
Flush-mounted door entry phone external unit with front in anodised aluminium and 1 aluminium call push-button, large name holder lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, watertight loudspeaker and electret microphone. Dimensions of external unit: 95x176x15 mm. Box dimensions: 95.5x176.5x35 mm.



**[ART. 2412 w]**  
**Additional telephone**  
Additional telephone for Kit 8260 or Kit 8261, complete with door opening push-button, additional push-button and call generator. 12V AC power supply. Converts into desk base Art. 1142W/OK.



**[ART. 3561] Surface-mounted door entry phone external unit - 1 push-button for 2 wire kit**  
Posto esterno citofonico da parete con frontale in alluminio anodizzato e 1 pulsante di chiamata in alluminio, ampio cartellino portanomi retroilluminato con led. Completo di portiere citofonico, regolazione dei 2 volumi, altoparlante stagno e microfono ad electret. Dimensioni posto esterno: 95x176x25 mm.



Comelit Group S.p.A. - via Don Arrigoni 5 - 24020 Rovetta S. Lorenzo BG Italy - tel. (+39) 0346 750 011 - fax (+39) 0346 71436  
www.comelit.it info@comelit.it commerciale.italia@comelit.it export.department@comelit.it



15, Rue Jean Zay - 69800 Saint Priest  
Tel 04 72 28 06 56 - Fax 04 72 28 83 29  
http://www.comelit.fr  
E-mail: Comelit.NH@wanadoo.fr



Polderweg Oost 26 - 2973 AN Molenaarsgraaf  
Tel 0184 64 91 58 - Fax 0184 64 01 58  
http://www.comelit.nl  
E-mail: info@comelit.nl



Chaussée de Jette, 388 - 1081 Koekelberg - Bruxelles  
Jetssesteenweg, 388 - 1081 Koekelberg - Brussel  
Tel 02 411 50 99 - Fax 02 411 50 97  
http://www.comelit.be



Unit 8 Fiddlebridge Industrial Estate  
Lemsford Road Hatfield Herts AL10 0DE  
Tel 01707 268826 - Fax 01707 266826  
http://www.comelitgroup.co.uk  
E-mail: b.ice@comelit.it

cod. 22592070GB



8

ze laschi-bg




CAT. 70

## Idealkit



# Idealkit 2

Idealkit 2 is the single-family door entry phone kit made by Comelit, which is extremely simple to install since it uses just 2 conductors. Idealkit 2 has an original and innovative design featuring the unmistakable **Comelit exclusive blue LEDs**, large nameholder labels and high audio quality. Simple addition of a door entry phone or an additional bell allows easy expansion, and an elegant desk base ensures flexibility for all requirements.

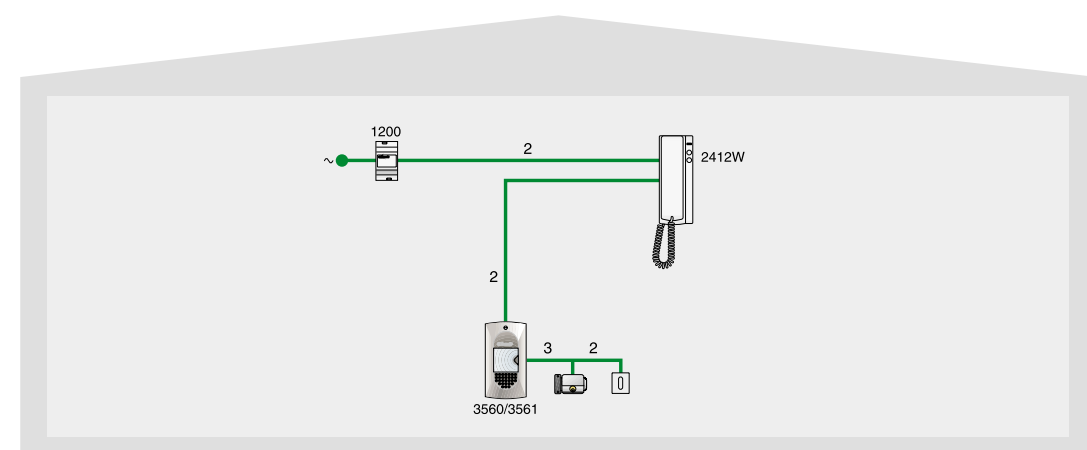

**[art. 8260] Single-family 2 wire flush-mounted kit**

The kit includes: a telephone art. 2412W, a transformer art. 1200, and a single-family external unit art. 3560.




**[art. 8261] Single-family 2 wire surface-mounted kit**

The kit includes: a telephone art. 2412W, a transformer art. 1200, and a single-family external unit art. 3561.

# Idealkit 5

Idealkit 5 is the "ideal" door entry phone kit created by Comelit which uses 5 wires and is available in the single-family and two-family versions. Idealkit 5 has an original and innovative design featuring the unmistakable **Comelit exclusive blue LEDs**, large nameholder labels and high audio quality. Simple addition of an additional telephone allows easy expansion, and an elegant desk base ensures flexibility for all requirements.

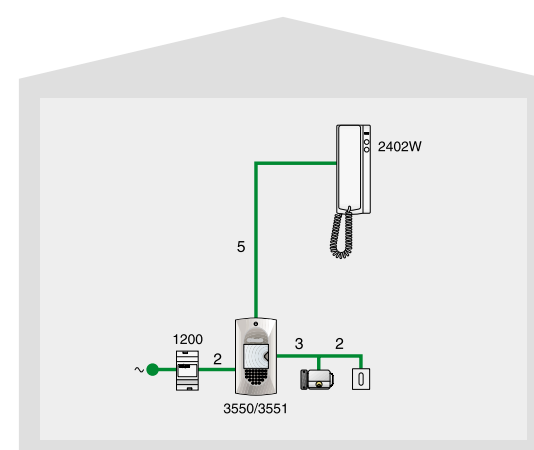


**[art. 8250] Single-family 5 wire flush-mounted kit**

The kit includes: a telephone art. 2402W, a transformer art. 1200 and a single-family external unit art. 3550.



**[art. 8251] Single-family 5 wire surface-mounted kit**

The kit includes: a telephone art. 2402W, a transformer art. 1200 and an external unit single-family art. 3551.

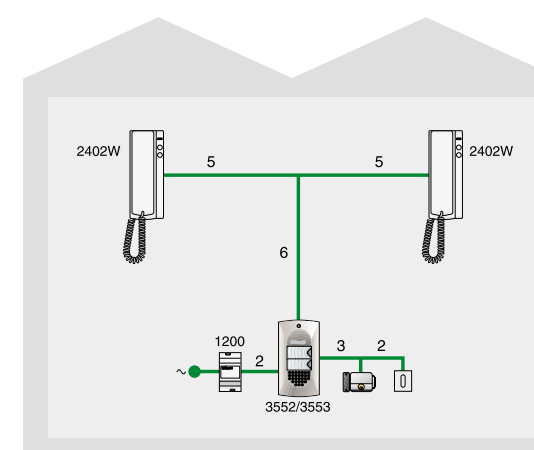

**[art. 8252] Two-family 5 wire flush-mounted kit**

The kit includes: two telephones art. 2402W, a transformer art. 1200 and a two-family external unit art. 3552.



**[art. 8253] Two-family 5 wires surface-mounted kit**

The kit includes: two telephones art. 2402W, a transformer art. 1200 and a two-family external unit art. 3553.

# Idealkit 5



**[ART. 2402W] Wall telephone**

White RAL 9010 telephone with electronic call, conversation button on the base, door opening push-button and supplementary push-button for additional services. With this model, it is not possible to add push-buttons, switches or supplementary LEDs. It can be used as a supplementary telephone for all Idealkit5 kits. Dimensions: 85x223x65 mm.



**[ART. 1149/10] Buzzer**

Blade buzzer to be inserted in the telephone when a different sound for the floor door call is required. 12V AC power supply. Pack of 10 pieces.



**[ART. 2404W] Wall telephone**

White RAL 9010 telephone with electronic call, conversation button on the base, door opening push-button and 3 additional push-buttons for additional services. It can be used as a supplementary telephone for all Idealkit5 kits. Dimensions: 85x223x65 mm.



**[ART. 1200] Transformer**

Transformer with 230V primary, 12V AC/15 VA secondary winding for continuous use. Dimensions: 53x95x65 mm (3 DIN modules).



**[ART. 1122/A] Relay**

12-24 V DC/AC 5A power supply, for general purposes. Dimensions: 66x85x35mm (4 DIN modules).



**[ART. 3550 and 3552] Flush-mounted door entry phone external unit - 1 and 2 push-buttons for 5 wire kit**

Flush-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, call generator, watertight loudspeaker and electret microphone. 12V AC power supply. Dimensions of external unit: 95x176x15 mm. Dimensions of flush-mounted box: 95,5x176,5x35 mm.



**[ART. 1142W/OK]**

**Desk base for OKAY telephones**

White RAL 9010 desk base which allows which allows all the Okay series telephones to be converted into the desk version. Complete with 1.5 mt of white cable and connection boss. Dimensions: 80,5x183x53 mm.



**[ART. 3551 and 3553] Surface-mounted door entry phone external unit - 1 and 2 push-buttons for 5 wire kit**

Surface-mounted door entry phone external unit with front in anodised aluminium and large nameholder label lit from the rear with an LED. Complete with speaker unit, adjustment of the 2 volumes, call generator, watertight loudspeaker and electret microphone. 12V AC power supply. Dimensions of external unit: 95x176x25mm.